

Trash  
Water

High Discharge Flow

Intensive Work

**SWT 50 EX**  
Pumps Range

Self-Priming


ENGINE  
**4ST | Gasoline**

DISCHARGE FLOW  
**45 m<sup>3</sup>/h**

PRESSURE  
**2.7 bar**

SOLID SIZE Ø  
**20 mm**

NET WEIGHT  
**34.5 kg**

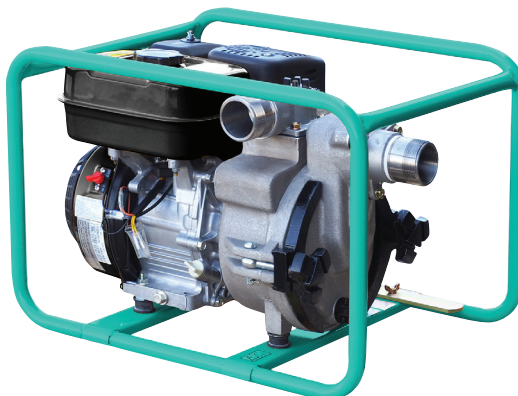

**3 YEARS**  
WARRANTY

EASY QUICK CLEAN  
**out port**

powered by



Built around durability, our SWT gasoline trash pumps feature a silicon carbide seal and a unique conical cast iron impeller design and a quickclean out port for easy maintenance and long service life. They reduce wear from abrasive materials and can handle solid objects up to 31 mm in diameter. There's even a strainer to ensure nothing bigger gets through.

### Standard equipment

- ✓ Four-stroke OHC engine
- ✓ Recoil start
- ✓ Electronic oil sensor security
- ✓ Silicon carbide mechanical seal
- ✓ Steel strainer, hose coupling and clamp

### Optional equipment

- + Wheelbarrow kit (factory option): 4NC
- + Firefighter hose coupling
- + Maintenance KIT N°2

### SWT 50 EX

Pump type		Self-Priming
Suction Ø coupling	mm	50 (2")
Delivery Ø coupling	mm	50 (2")
Discharge flow	L/min	750
Discharge flow	m <sup>3</sup> /h	45
Pressure	bar	2.7
Total dynamic head	m	27
Discharge head	m	8
Solid size Ø (Ø of strainer holes)	mm	20
Mechanical seal		Silicon carbide
Engine model		WORMS EX17
Engine type		OHC, 4-stroke gasoline
Fuel type		Unleaded gasoline 95
Fuel tank capacity	L	3.2
Autonomy	h	2 h 20
Dimensions L x l x H	mm	570 x 436 x 397
Packaging dimensions L x W x H	mm	600 x 470 x 440
Net Weight	kg	34.5
Gross weight	kg	36.5

### WORMS Entreprises

ZAC de Lamirault  
39 rue de Lamirault  
77090 Collégien  
FRANCE  
TEL. +33 (0) 1 64 76 29 50  
FAX +33 (0) 1 64 76 29 99  
www.wormsentreprises.com