Dynapac CA5500D



Single drum vibratory rollers



Technical data

Masses Masses	
Operating mass (incl. ROPS)	18200 kg
Operating mass (incl. Cab)	18400 kg
Module mass (front/rear)	11850/6550 kg
Max. operating mass	18600 kg

Dimensions	
Drum width	2130 mm

Traction	
Speed range (Dual/TC/AS)	4/6/7/11
Tyre size (12 ply)	23,1 x 26
Theor. gradeability	56 %
Vertical oscillation	±9°

₩.	Compaction	
	Static linear load	56 kg/cm
	Nominal amplitude (high/low)	2.1 mm/0.8 mm
	Vibration frequency (high/low amplitude)	29 Hz/30 Hz
	Centrifugal force (high/low amplitude)	360 kN/150 kN

Engine	
Fuel tank capacity	272
Engine	

Engine		
Manufacturer/Model	Deutz TCD2012L06 (IIIA/3)	
Туре	Water cooled turbo Diesel	
Rated power, ISO 14396	128 kW (174 hp) @ 2200 rpm	

Engine		
Manufacturer/Model	Deutz TCD6,1L06 (IIIB/4i)	
Туре	Water cooled turbo Diesel	
Rated power, ISO 14396	129 kW (175 hp) @ 2200 rpm	


Hydraulic syst	em
Driving	Hydrostatic
Vibration	Hydrostatic
Steering	Hydrostatic
Service brake	Hydrostatic in forward and reverse lever.
Parking/ Emergency brake	Failsafe multidisc brake in drum gear box and in rear axle.


Dynapac CA5500D



Single drum vibratory rollers

Technical data

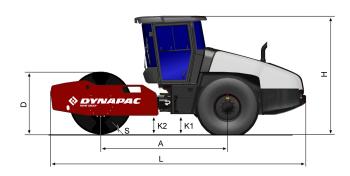

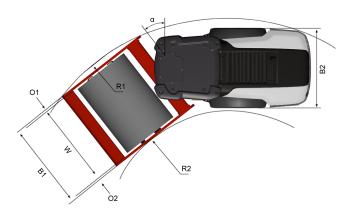

Dimensions	
A. Wheelbase	3100 mm
B1. Width, front	2340 mm
B2. Width, rear	2130 mm
D. Drum diameter	1546 mm
H1. Height, with ROPS/cab	2890 mm
H2. Height, w/o ROPS/cab	2130 mm
K1. Ground clearance	450 mm
K2. Curb clearance	450 mm
L. Length	6240 mm
O1. Overhang, right	105 mm
O2. Overhang, left	105 mm
R1. Turning radius, outside	5800 mm
R2. Turning radius, inside	3300 mm
S. Drum shell thickness	48 mm
W. Drum width	2130 mm
α. Steering angle	±38°